




PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04Q 7/22, 3/00		A1	(11) International Publication Number: WO 99/57926
			(43) International Publication Date: 11 November 1999 (11.11.99)
(21) International Application Number: PCT/US99/09636		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 3 May 1999 (03.05.99)			
(30) Priority Data: 09/072,527 4 May 1998 (04.05.98) US			
(71) Applicant: ADC TELECOMMUNICATIONS, INC. [US/US]; 12501 Whitewater Drive, Minnetonka, MN 55343 (US).			
(72) Inventors: IRTEN, Kerem; 71 Tudor Ridge, Stratford, CT 06497 (US). YALCINKAYA, Atakan; Apartment E2, 572 Whitney Avenue, New Haven, CT 06511 (US). BRUKMAN, David; 1010 Dell Drive, Cherry Hill, NJ 08003 (US).			
(74) Agent: VIKSNINS, Ann, S.; Schwegman, Lundberg, Woessner & Kluth, P.O. Box 2938, Minneapolis, MN 55402 (US).			
		Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	

(54) Title: METHOD AND APPARATUS FOR ROUTING SHORT MESSAGES

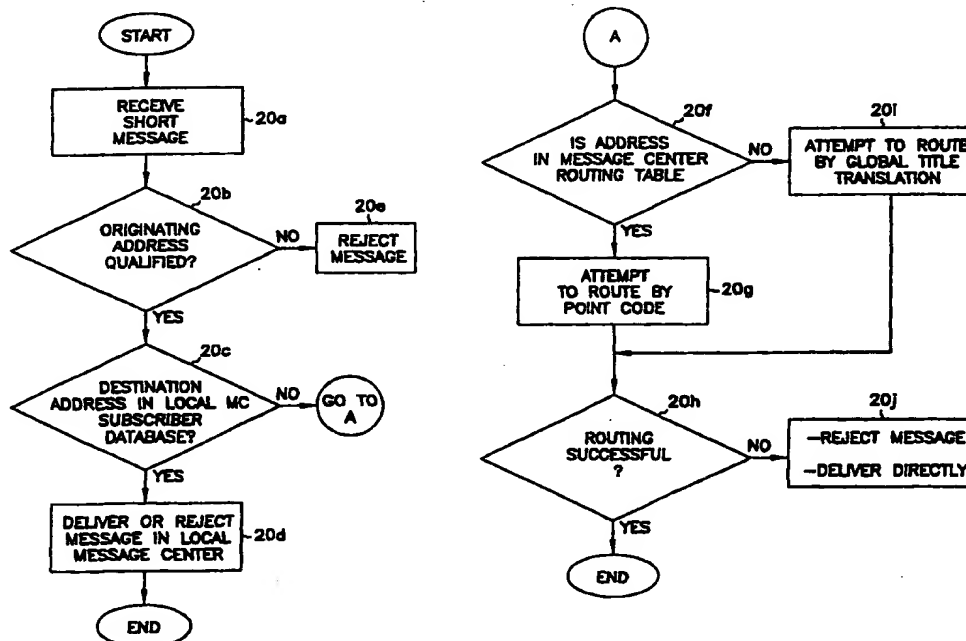

(57) Abstract

A system for routing short messages between message centers provides that messages are first checked to see if they are to be handled by the local message center, and then routed, if appropriate, to another message center using point code or global title translation routing.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Larvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakistan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

METHOD AND APPARATUS FOR ROUTING SHORT MESSAGES

5 Copyright Notice/Permission

A portion of the disclosure of this patent document contains material which is subject to copyright protection. The copyright owner has no objection to the facsimile reproduction by anyone of the patent document or the patent disclosure, as it appears in the Patent and Trademark Office patent file or
10 records, but otherwise reserves all copyright rights whatsoever. The following notice applies to the software and its interfaces as described below and in the drawing hereto: Copyright © 1998, ADC NewNet, Inc. All Rights Reserved.

Technical Field of the Invention

The present invention relates generally to mobile telephone systems, and
15 more particularly to method and apparatus for routing short messages between multiple message centers.

Background of the Invention

The Short Message Service for IS-41 (ANSI-41) mobile networks is defined in the ANSI/EIA/TIA standard starting with version C (also known as
20 IS-41-C) (*See ANSI/EIA/TIA Standard 41-D, Cellular Radio-Telecommunications Intersystem Operations*, Electronics Industries Association, 1997) ("IS-41D Specification"). This document defines network entities called Mobile Centers (MCs) which are responsible for receiving, storing and forwarding short messages from and to Short Message Entities (SMEs). In most
25 cases, these entities correspond to mobile handsets (MSs), and are formally defined as *MS-based SMEs*. In some cases, these SMEs can be based on the mobile center or other network nodes, and are known as *fixed SMEs*.

The underlying transport layer for IS-41 messages is usually SS7. The IS-41 entities in the SS7 network are addressed using Point Code/Subsystem
30 Number (PC/SSN) identifiers. On the other hand, short messages are addressed using MINs (Mobile Identification Numbers) or DN (Destination Numbers), corresponding to the telephone numbers of the mobile handset.

In general, the short message is delivered to an MC, which stores the message. The MC will attempt to deliver a message during a certain period.

Since the destination may be temporarily unreachable (e.g., the subscriber's handset is out of range), the MC may attempt to deliver several times. The standard also allows one MC to forward the message to another MC, which will actually make the delivery. The signaling procedures for standard MC interworking are specified in Section 6 of the IS-41D Specification. Section A4.46.6 MC Receiving and SMSDeliveryPointToPoint INVOKE@ describes in pseudo-code how a short message is treated by an MC. There are three actions that while mentioned are not specified:

- 1) How to determine if the original originating address is a SME homed to the local MC 10 (step 1-16-1).
- 2) How to determine if the destination address is a SME homed to this MC 10 (step 1-17-1).
- 3) How to determine where to forward the message (step 1-16-1-3, referring to procedure 4.46.7).

Thus, the standard ([IS41D]) does not specify how to determine the home MC or how to route (that is, how to determine the PC/SSN address) a short message from one MC to another. In their book entitled *Mobile Telecommunication Networking with IS-41*, (McGraw-Hill, 1997), Michael D. Gallagher and Randall A. Snyder discuss the routing for forwarding the short message between two MCs. Their suggestions are fixed MIN-to-MC table (similar to the internal MC route table described below) or MIN-to-MC Global Title Translation (GTT). While Gallagher and Snyder describe how to do routing, they offer no solution for making the home MC determination.

Summary of the Invention

One embodiment of the invention offers a flexible approach for determining whether a given subscriber is homed to the local MC. The combination of subscriber database profiles and default subscriber profiles allows the customer to implement schemes such as white-listing (only explicitly provisioned subscribers receive service), black-listing (all receive service except those explicitly disallowed in the database), or some combination.

In addition, one embodiment of the invention offers a flexible routing mechanism which allows a combination of point code and global title translation routing. Furthermore, the invention allows the customer to try to deliver a message directly if the forwarding fails (for instance of the destination's home MC is unknown or consistently unreachable).

Brief Description of the Drawing

Figure 1 illustrates a plurality of message centers interconnected with an SS7 signaling network.

Figure 2 illustrates a message center processing system in simplified form.

Figures 3A and 3B illustrate the software and corresponding process for processing short messages according to one example embodiment of the invention.

Detailed Description of the Invention

In the following detailed description of the preferred embodiments, reference is made to the accompanying drawings that form a part hereof, and in which are shown by way of illustration specific embodiments in which the invention may be practiced. It is understood that other embodiments may be utilized and structural changes may be made without departing from the scope of the present invention.

Referring now to Figure 1, there is illustrated a plurality of message centers 10a-10d, interconnected with an SS7 network 12, which includes SS7 links 11. As described herein, message centers 10 transfer short messages between one another over the SS7 network. In this example embodiment of the invention, short messages are transported and delivered in accordance with the Short Message Service for IS-41 (ANSI-41) mobile networks as specified above. Although described herein in the form of an SS7 network, other transport architectures may also be used for the purpose of transporting short messages.

Referring now to Figure 2, there is illustrated in simplified form a short message processing system 13, according to one example embodiment of the invention. As illustrated, short messages are received at processing system 13

from an SS7 link 11, or from another source over port 15, that may originate from within or without the message center 10. System 13 includes a hardware platform 14b and software components 14b. System 13 further includes a subscriber database 14c, maintaining a list of subscribers served by the message center 10, and also a routing table 14d, pursuant to conventional IS-41 operation. Hardware platform 14a is preferably a workstation computer configured to provide a physical layer connection to the SS7 links 11 and to other external devices and networks. Software components 14b preferably include a UNIX type or equivalent multitasking operation system, and other software for implementing control functions for message processing, for example as illustrated with respect to the flow chart of Figures 3A and 3B.

Referring now to Figures 3A and 3B, there is described one embodiment of the message processing method and software of the invention. A short message is received at the processing system 13 (20a). A check is made to see if the message is qualified (20b), and if not, it is rejected or otherwise processed (20e). Qualifying the message is not essential to the invention, but may be done by determining if the originating address (phone number of originating program or handset) matches a specific profile in the local subscriber database 14c, with the profile determining whether the message is accepted for processing or rejected. If the subscriber database 14c does not have a match, a default subscriber profile can be used to determine whether the message is accepted for processing or rejected.

If the message is accepted for processing, it is determined whether the destination address is homed to the local MC 10. More particularly, if the destination address (phone number of destination program or handset) matches a specific profile in the local subscriber database 14c (20c), the profile determines whether the message will be delivered directly (following standard [IS41D] procedure) or rejected (20d).

Otherwise, the message is forwarded to the home MC 10 of the destination. If the point code (PC) / sub-system number (SSN) of the destination's home MC 10 is in the MC route table (14d) (20f), then the short message is forwarded to the destination MC 10 using the PC/SSN (20g).

Otherwise, global title translation (GTT) is attempted for MC 10 routing (20i), and if successful the message will be forwarded to the destination's home MC 10 using the destination address and MIN-to-MC translation.

Alternatively, the invention may be embodied such that only one of the
5 above routing procedures is configured, (i.e. either routing by point code or by GTT), or routing is done by first trying one routing technique, and then the other if the first is not achievable.

If any event the forwarding step fails (20h) (for instance of the destination's home MC is unknown or consistently unreachable), the default
10 subscriber profile determines whether the message will be delivered directly or rejected (20j).

Alternate Embodiments

The present invention is in no way limited to the example embodiment described herein. The invention is not limited to any type or form of software.
15 Nor is it limited to any particular type of hardware or operating system platforms, or client-server or network architecture. Moreover, the messaging system of the invention may also be implemented in alternate ways without departing from the scope of the invention. Furthermore, the software of the invention may also be implemented in whole or in part in hardware, and vice
20 versa.

Conclusion

Thus, the present invention offers a flexible approach for determining whether a given subscriber is homed to the local MC. The combination of subscriber database profiles and default subscriber profiles allows the customer
25 to implement schemes such as white-listing (only explicitly provisioned subscribers receive service), black-listing (all receive service except those explicitly disallowed in the database), or some combination. In addition, the invention offers a flexible routing font mechanism which allows point code routing, GTT routing, and a combination of the two. Furthermore, the invention
30 allows the customer to try to deliver a message directly if the forwarding fails.

What is claimed is:

1. A method of processing a short message in an SS7 network, comprising:
receiving a short message at a local message center computer
5 system;
checking a message center subscriber database in the computer
system to determine if the message is addressed to the message center
such that the message is to be delivered under control of the message
center;
10 if the message is not addressed to the local message center,
looking for the address of the destination message center in a message
center routing table in the computer system;
if the address is in the routing table, routing the message to the
destination message center according to a point code addressing; and
15 if the address is not in the routing table, routing the message to
the destination message center by global title translation addressing.
2. A method according to claim 1 further including the step of the local
message center attempting to directly deliver a short message which could not be
20 delivered to its proper destination message center.
3. A program product comprising a computer program encoded in a
machine readable medium, the computer program including program code
executable on a suitably configured computer to process a short message in an
25 SS7 network, according to the following steps:
receiving a short message at a local message center computer
system;
checking a message center subscriber database in the computer
system to determine if the message is addressed to the message center
30 such that the message is to be delivered under control of the message
center;

if the message is not addressed to the local message center,
looking for the address of the destination message center in a message
center routing table in the computer system;

5 if the address is in the routing table, routing the message to the
destination message center according to a point code addressing; and

if the address is not in the routing table, routing the message to
the destination message center by global title translation addressing.

4. A product according to claim 3 further wherein the computer code is
10 operative on the computer to attempt to directly deliver a short message which
could not be delivered to its proper destination message center.

5. A computer system for processing short messages in an SS7 network,
comprising:

15 a hardware platform;

one or more software components executing on the hardware
platform for

checking a local message center subscriber database in the
computer system to determine if the message is addressed to the local
20 message center such that the message is to be delivered under control of
the message center;

if the message is not addressed to the local message center,
looking for the address of the destination message center in a message
center routing table in the computer system;

25 if the address is in the routing table, routing the message to the
destination message center according to a point code addressing; and

if the address is not in the routing table, routing the message to
the destination message center by global title translation addressing.

30 6. A product according to claim 5 further wherein the computer program
components include code which is operative on the computer to attempt to
directly deliver a short message which could not be delivered to its proper
destination message center.

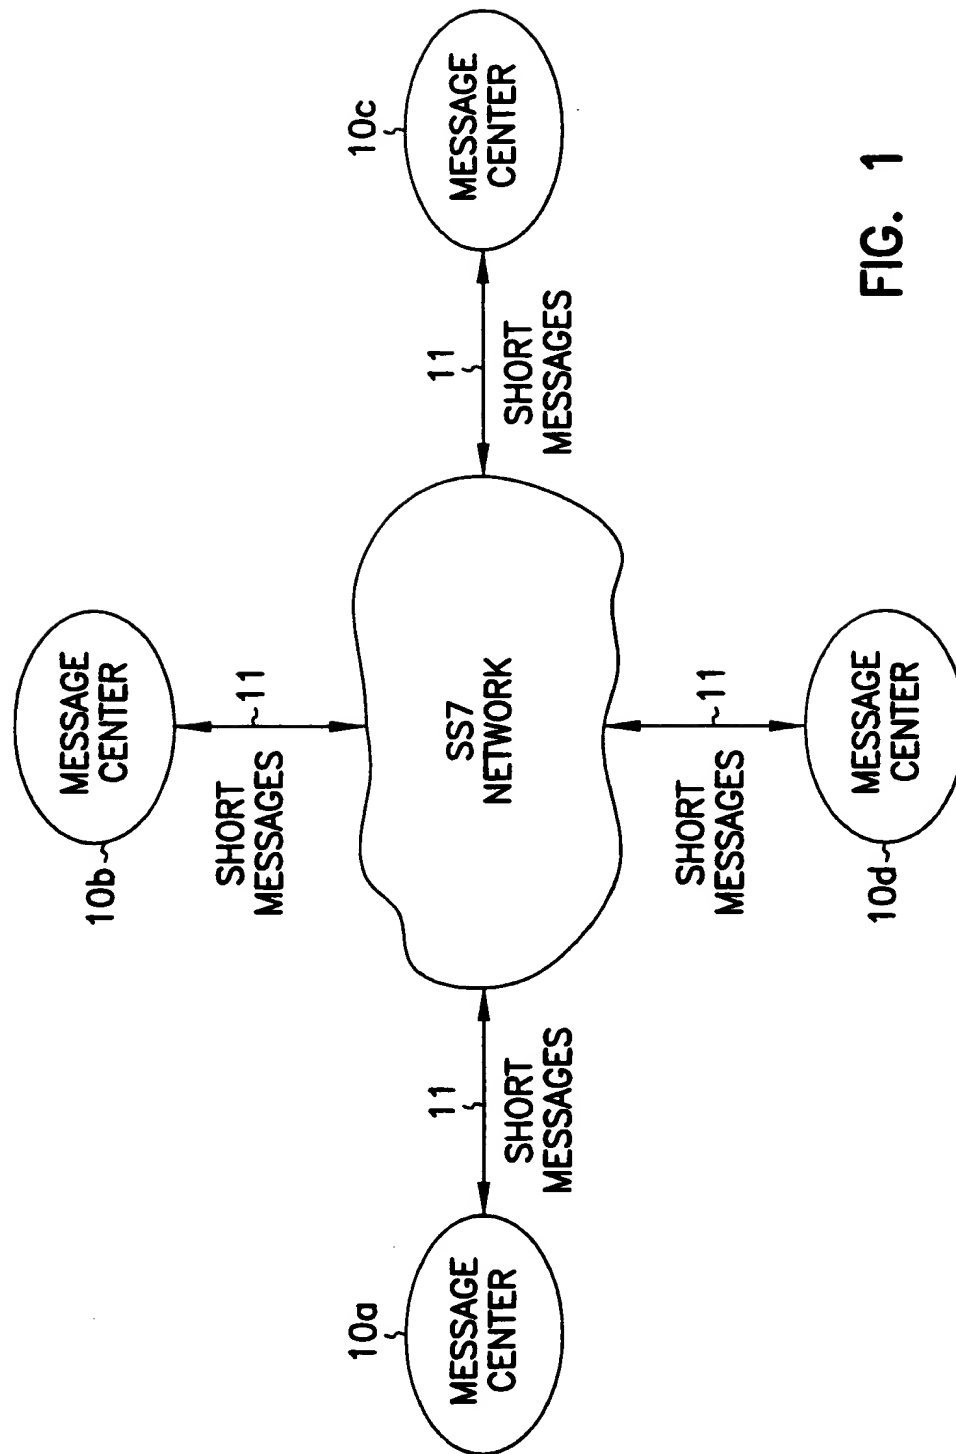


FIG. 1

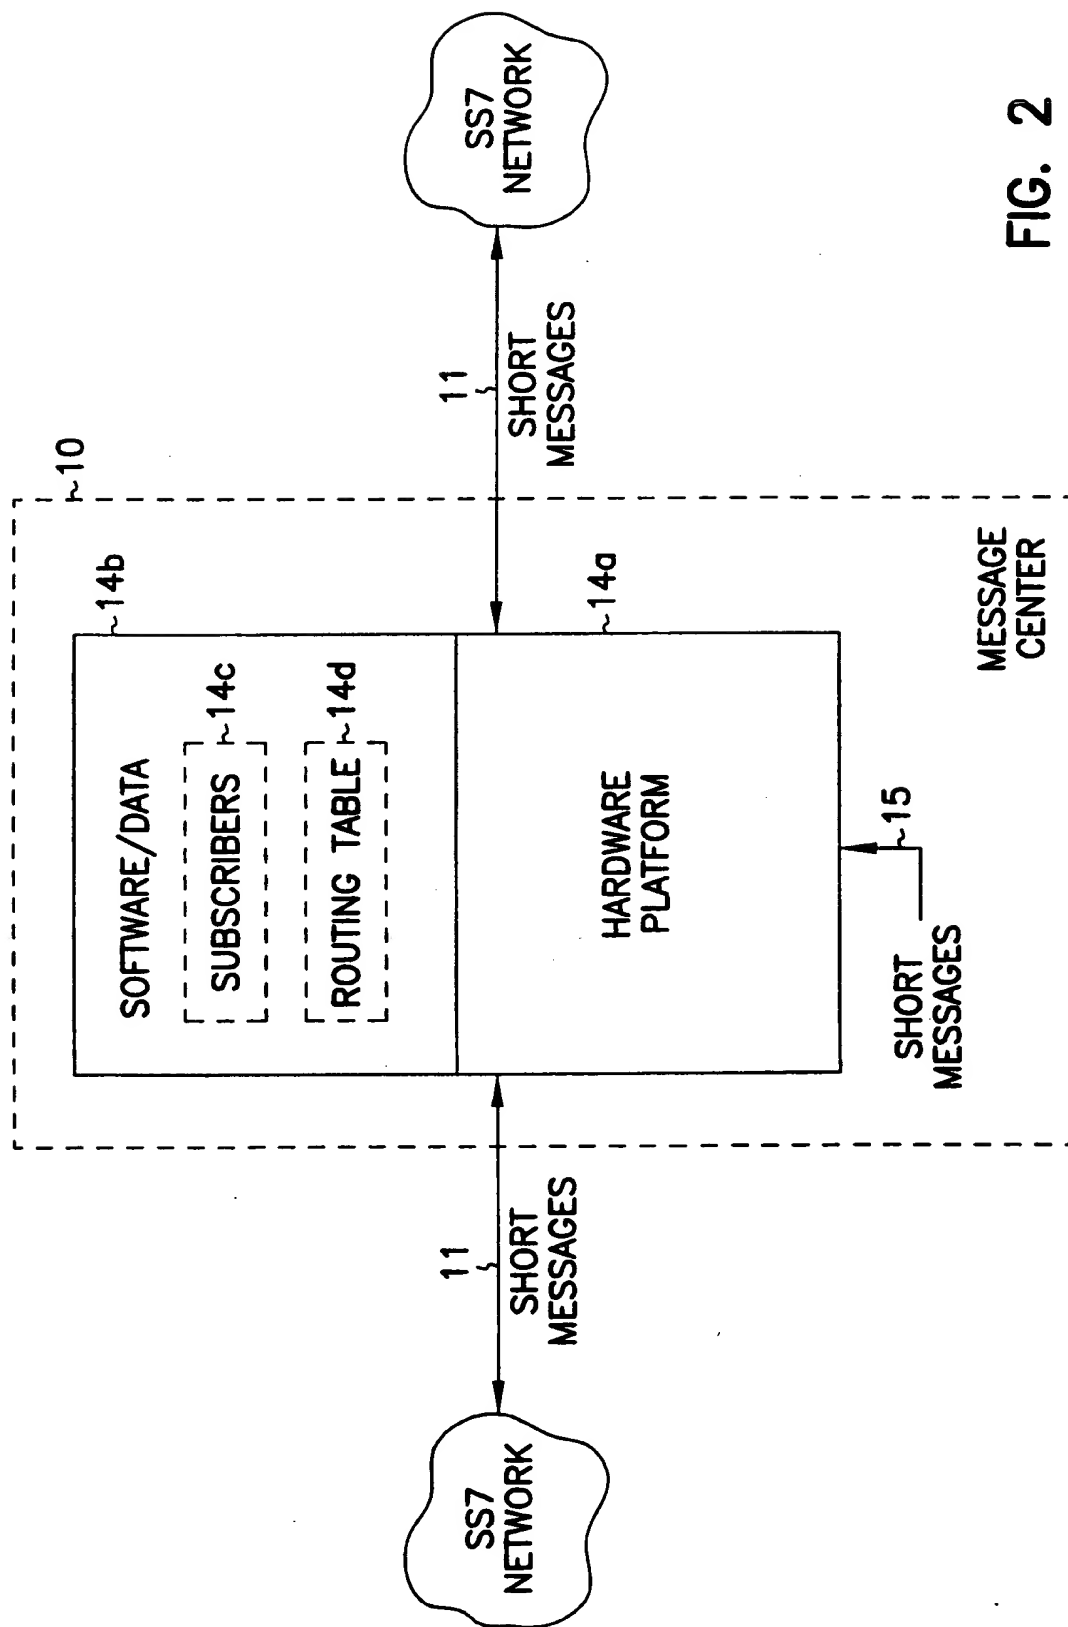


FIG. 2

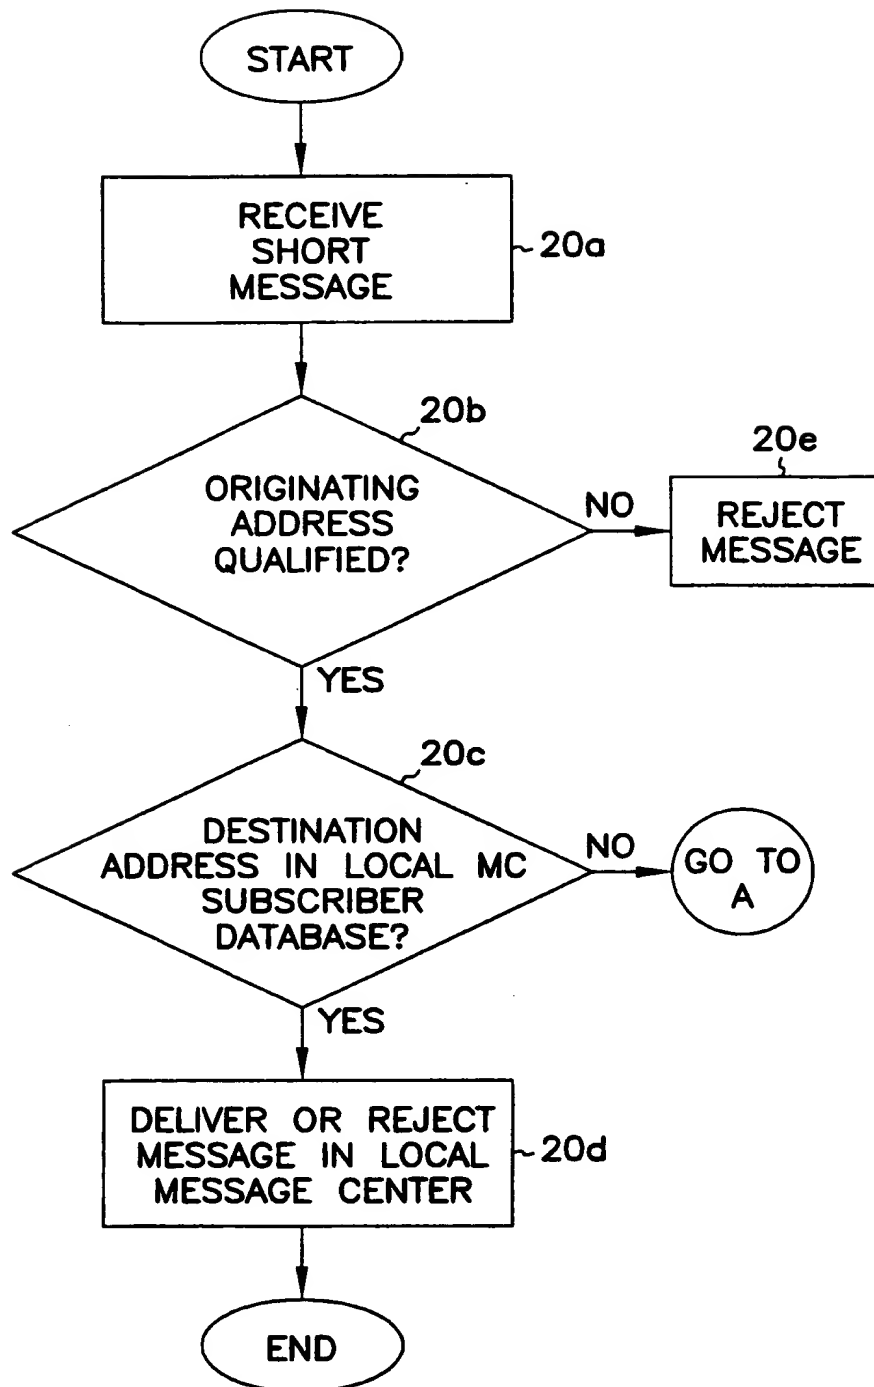


FIG. 3A

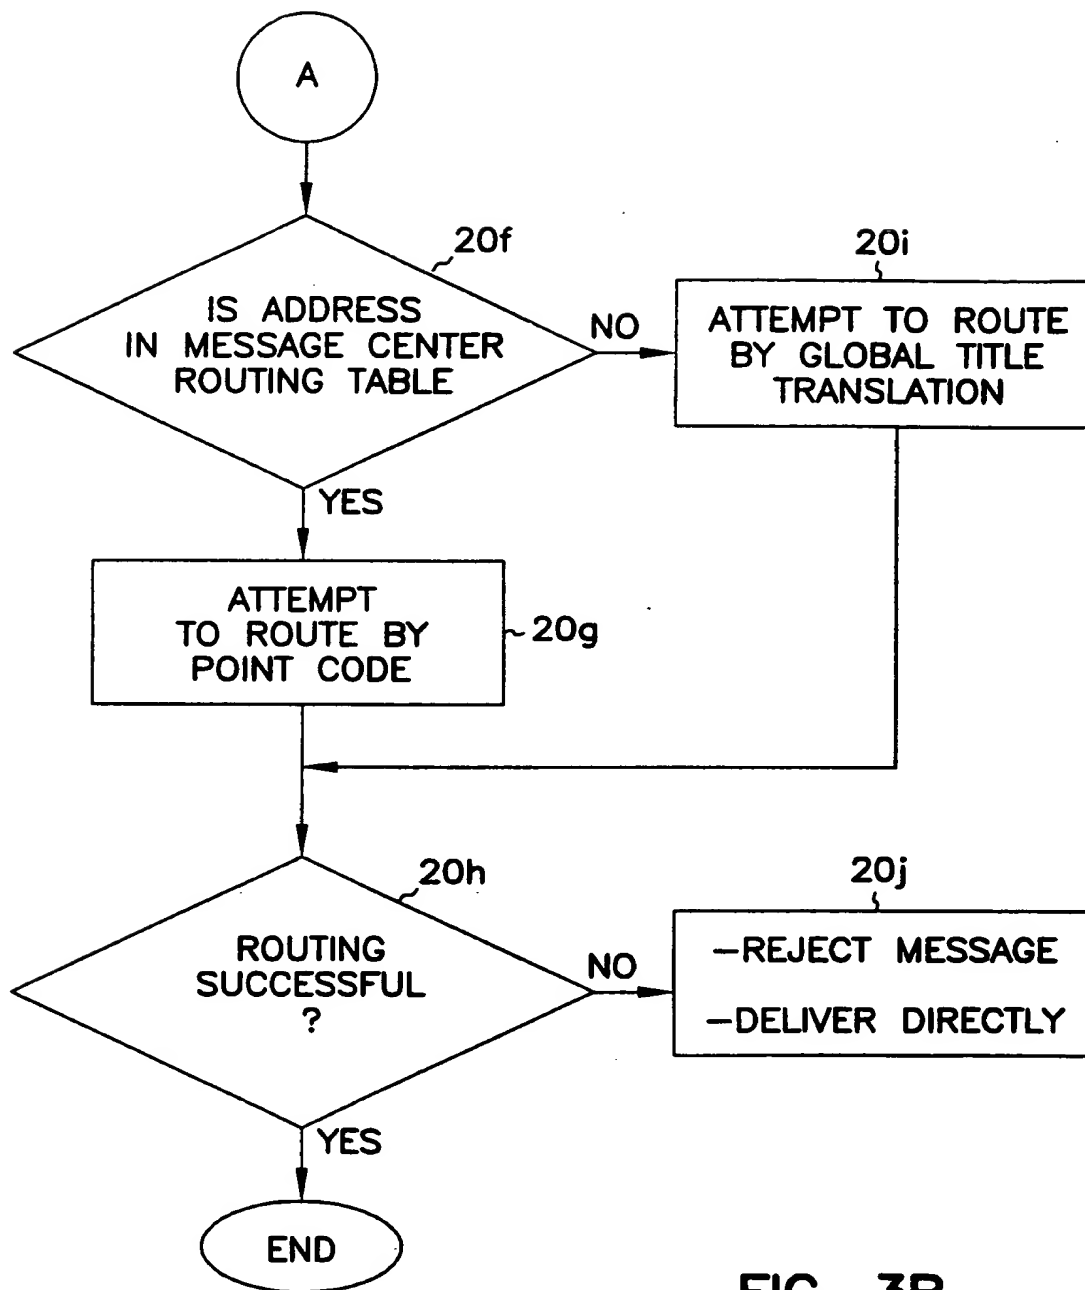


FIG. 3B

INTERNATIONAL SEARCH REPORT

In **ational Application No**
PCT/US 99/09636

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 H0407/22 H0403/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6 H040

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	M.D. GALLAGHER, R.A. SNYDER: "Mobile Telecommunications Networking with IS-41" 1997, MCGRAW-HILL, PAGES 285-310 XP002113135 cited in the application page 297, line 4 - page 299, line 19; figure 13.7 ---	1,3,5
A	ELECTRONICS INDUSTRIES ASSOCIATION: "ANSI/EIA/TIA Standard 41-D, Cellular Radio Telecommunications Intersystems Operations; Section A4.46.6" ANSI/EIA/TIA STANDARD 41-D, 1997, pages 284-286, XP002113134 cited in the application the whole document --- -/--	1,3,5

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

24 August 1999

Date of mailing of the international search report

03/09/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl.
Fax: (+31-70) 340-3016

Authorized officer

Baas, G

INTERNATIONAL SEARCH REPORT

In ational Application No
PCT/US 99/09636

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 97 44962 A (ERICSSON GE MOBILE INC) 27 November 1997 (1997-11-27) page 2, line 33 - page 4, line 2 ----	1,3,5
A	WO 97 36450 A (ERICSSON GE MOBILE INC) 2 October 1997 (1997-10-02) page 11, line 27 - page 13, line 16 ----	1,3,5
A	WO 95 12292 A (ERICSSON TELEFON AB L M) 4 May 1995 (1995-05-04) page 6, line 23 - page 9, line 23 -----	1,3,5

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 99/09636

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9744962 A	27-11-1997	US 5838782 A	17-11-1998
		AU 3223697 A	09-12-1997
		EP 0901737 A	17-03-1999
WO 9736450 A	02-10-1997	US 5878347 A	02-03-1999
		AU 2344597 A	17-10-1997
		AU 2661497 A	17-10-1997
		EP 0890283 A	13-01-1999
		EP 0890287 A	13-01-1999
		WO 9736451 A	02-10-1997
WO 9512292 A	04-05-1995	AU 678310 B	22-05-1997
		AU 8069594 A	22-05-1995
		CN 1116893 A	14-02-1996
		EP 0677232 A	18-10-1995
		FI 953142 A	22-06-1995